

Page 1 of 14

ESP0507/1

EPSON STYLUS 200

Page 2 of 14

[illegible]

EPSON

STYLUS 200

Page 3 of 14

REF	PART NO.	DESCRIPTION	QTY	REMARKS
200	2021835	BOARD ASSY. MAIN	1	
IC3	2022622	P-ROM TDC07	1	4M BIT
CN1	2005881	CONNECTOR	1	21 PIN
CN3	X600440410	CONNECTOR	1	4 PIN
CN4	2018248	CONNECTOR	1	19
CN5	2017929	CONNECTOR	1	4
CN6	2017149	CONNECTOR	1	5
CN7	X600440120	CONNECTOR	1	2 PIN
CN8	X600440310	CONNECTOR	1	3 PIN
CN9	2003678	CONNECTOR	1	2
CR1	2022140	CERAMIC OSCILLATOR	1	5.52MHZ
CR2	2021879	CERAMIC OSCILLATOR	1	25MHZ
C1 C5 C28	2002486	CHIP CAPACITOR	6	0.1UF DC25V +80% -20%
C10	X271122221	CHIP CAPACITOR	1	2200PF DC50V 10%
C11	2021880	CHIP CAPACITOR	1	TP 4700PF 50V
C12	2014921	ALUM. ELECTRIC. CAP.	1	TP 220UF 50V +-20%
C14 C18	2002486	CHIP CAPACITOR	5	0.1UF DC25V +80% -20%
C19 C59	X281323301	CHIP CAPACITOR	2	33PF 50V 5%
C20 C22	2002486	CHIP CAPACITOR	3	0.1UF DC25V +80% -20%
C23 C51	X271124711	CHIP CAPACITOR	2	470PF 50V 10%
C29 C39	2002486	CHIP CAPACITOR	2	0.1UF DC25V +80% -20%
C30 C34	X271121021	CHIP CERAMIC CAPACITOR	2	1000PF DC50V 10%
C31 C33	2002486	CHIP CAPACITOR	3	0.1UF DC25V +80% -20%
C35	2017933	ALUM. ELECTRIC. CAP.	1	TP 220UF 10V +-20%
C36 C37	2018119	ALUM. ELECTRIC. CAP.	2	BL 100UF 50V +-20%
C38 C53	X281323301	CHIP CAPACITOR	2	33PF 50V 5%
C40	2002487	CHIP CAPACITOR	1	0.01UF 50V 10%
C41 C43	X271124711	CHIP CAPACITOR	3	470PF 50V 10%
C44 C45	2002500	CHIP CAPACITOR	2	TP 4700PF 50V +-1
C46 C50	X281323301	CHIP CAPACITOR	5	33PF 50V 5%
C52 C54	2002486	CHIP CAPACITOR	2	0.1UF DC25V +80% -20%
C55 C57	2002486	CHIP CAPACITOR	2	0.1UF DC25V +80% -20%
C58 C65	2002486	CHIP CAPACITOR	2	0.1UF DC25V +80% -20%
C6 C7 C13	X271124711	CHIP CAPACITOR	3	470PF 50V 10%
C60 C61	X271124711	CHIP CAPACITOR	2	470PF 50V 10%
C63 C64	X281323301	CHIP CAPACITOR	2	33PF 50V 5%
C8 C9	2003503	CHIP CAPACITOR	2	TP 3300PF 50V +-10%
D1 D10	2014230	DIODE	2	80V 100MA 0MW
D11	2014230	DIODE	1	80V 100MA 0MW
D2 D9	2004113	SHOT KEY	1	-50V 500MA
IC1	2022297	GATE ARRAY E05B32KB	1	50V 500MA
IC10	2014681	EEPROM	1	SOP 1K BIT 8
IC11	X422350079	TTL-IC	1	HEX BUF/DRV OC HI-VOCT
IC13	2009451	RESET IC	1	SOP 4
IC15	X440004314	VOLTAGE REGULATOR IC	1	SHUNT REGULATOR UPK
IC16	2018007	HIC	1	
IC2	2021874	MICROCOMPUTER	1	100 PIN
IC3	X630114230	IC SOCKET	1	42 PIN
IC4	2015936	PSRAM	1	
IC6	2020754	MASK ROM M80A78JA	1	8M BIT
IC8	2017973	HIC UDN2917EB-TR	1	
IC9	2007915	RESET IC	1	8 PIN
LED1 LED2	2021878	CHIP LED	2	0V 0MA 0MW
LED3	2021877	CHIP LED	1	0V 0MA 0MW
QM1 QM6	2017228	TRANSISTOR	2	40V 100MA 0W 120 0
QM2 QM3	2017885	TRANSISTOR	2	50V 100MA 0W 0 0
QM4	2017239	TRANSISTOR	1	50V 100MA 300MW 0 0
QM5	2017227	TRANSISTOR	1	-40V -100MA 0W 120 0
QM7	2017242	TRANSISTOR	1	50V 3A 1.5W 140 400

ESP0507/3

EPSON

STYLUS 200

REF	PART NO.	DESCRIPTION	QTY	REMARKS
QM8	2021651	TRANSISTOR	1	-50V -2A 0.65W 0 0
Q1	X306271209	TRANSISTOR	1	50V 150MA 150MW
Q2	2013876	TRANSISTOR	1	-50V -500MA 150MW 70 24
Q4 Q7 Q8	2017235	TRANSISTOR	3	50V 100MA 200MW 0 0
RM10 RM11	2021630	CHIP RESISTOR ARRAY	2	TP 10KOHM 1/16W +-5%
RM13 RM18	2021621	CHIP RESISTOR ARRAY	6	TP 47OHM 1/16W +-5%
RM19 RM21	2021624	CHIP RESISTOR ARRAY	3	TP 100OHM 1/16W +-5%
RM2 RM22	2021630	CHIP RESISTOR ARRAY	2	TP 10KOHM 1/16W +-5%
RM24	2021621	CHIP RESISTOR ARRAY	1	TP 47OHM 1/16W +-5%
RM4 RM5	2021627	CHIP RESISTOR ARRAY	2	TP 3.3KOHM 1/16W +-5%
RM6 RM7	2021626	CHIP RESISTOR ARRAY	2	TP 1KOHM 1/16W +-5%
RM8 RM9	2021627	CHIP RESISTOR ARRAY	2	TP 3.3KOHM 1/16W +-5%
R1 R4 R7	X193011032	CHIP RESISTOR ERJ-6GEYJ103V	3	10K OHM 1/10W 5%
R10 R11	2017916	METAL OXIDE FILM RESISTOR	2	BL 0.47OHM 1W +-2%
R102 R103	X193011032	CHIP RESISTOR ERJ-6GEYJ103V	2	10K OHM 1/10W 5%
R104 R106	2001519	CHIP RESISTOR	3	68 OHM 1/10W 5%
R108	2019184	CHIP RESISTOR	1	TP 1.27KOHM 1/10W +-1%
R110	2001520	CHIP RESISTOR	1	100 OHM 1/10W 5%
R112	X193011032	CHIP RESISTOR ERJ-6GEYJ103V	1	10K OHM 1/10W 5%
R113 R115	2001529	CHIP RESISTOR	2	2.2K OHM 1/10W 5%
R114	2001526	CHIP RESISTOR	1	680 OHM 1/10W 5%
R12 R13	X193011022	CHIP RESISTOR ERJ-6GEYJ102V	2	1K OHM 1/10W 5%
R14 R15	2005470	CHIP RESISTOR	2	56K OHM 1/10W 5%
R16	2016946	CHIP RESISTOR	1	TP 22.1OHM 1/10W +-1%
R17	2004033	CHIP RESISTOR	1	121 OHM 1/10W 1% TP
R18	2021395	CHIP RESISTOR	1	TP 37.4KOHM 1/10W +-1%
R19 R20	2018192	CHIP RESISTOR	2	TP 523OHM 1/10W +-1%
R2 R5	2001541	CHIP RESISTOR	2	1M OHM 1/10W 5%
R21	2009983	CHIP RESISTOR	1	
R22	2016963	CHIP RESISTOR	1	TP 1.6KOHM 1/10W +-5%
R23 R25	2015009	CHIP RESISTOR	2	TP 16KOHM 1/10W +-5%
R24	2001620	CHIP RESISTOR	1	24.9K OHM 1/10W 1%
R26 R28	2005305	CHIP RESISTOR	2	820 OHM
R27	2001617	CHIP RESISTOR	1	9.76K OHM 1/10W 1%
R29 R36	2015009	CHIP RESISTOR	2	TP 16KOHM 1/10W +-5%
R30	X194601822	CHIP RESISTOR	1	18.2K OHM 1/10W 1%
R31	2019312	CHIP RESISTOR	1	TP 1.96KOHM 1/10W +-1%
R32	2011796	CHIP RESISTOR	1	TP 4.02KOHM 1/10W +-1%
R33	2016956	CHIP RESISTOR	1	TP 39KOHM 1/10W +-1%
R34	2008474	CHIP RESISTOR	1	2.26K OHM 1/10W 1%
R35	X130221216	METAL OXIDE FILM RESISTOR	1	120 OHM 2W 5%
R37	2016963	CHIP RESISTOR	1	TP 1.6KOHM 1/10W +-5%
R38	2005302	CHIP RESISTOR	1	3.9K OHM
R39 R42	X193011032	CHIP RESISTOR ERJ-6GEYJ103V	2	10K OHM 1/10W 5%
R40 R94	2017942	METAL FILM RESISTOR	2	BL 0.82OHM 1/2W +-2%
R41 R50	2001532	CHIP RESISTOR	2	5.6K OHM 1/10W 5%
R44 R49	X193011032	CHIP RESISTOR ERJ-6GEYJ103V	6	10K OHM 1/10W 5%
R46	2001529	CHIP RESISTOR	1	2.2K OHM 1/10W 5%
R47 R81	2001526	CHIP RESISTOR	2	680 OHM 1/10W 5%
R51	2001536	CHIP RESISTOR	1	20K OHM 1/10W 5%
R52	2008955	CHIP RESISTOR	1	200 OHM 1/4W 5%
R53 R54	X193011032	CHIP RESISTOR ERJ-6GEYJ103V	2	10K OHM 1/10W 5%
R55	2008778	CHIP RESISTOR	1	120K OHM 1/10W 1%
R56	2008478	CHIP RESISTOR	1	4.7K OHM 1/10W 1%
R57 R92	X193011022	CHIP RESISTOR ERJ-6GEYJ102V	2	1K OHM 1/10W 5%
R58	2001613	CHIP RESISTOR	1	2.55K OHM 1/10W 1%
R59 R96	2008817	CHIP RESISTOR	2	1K OHM 1/10W 1%
R60	2014640	CHIP RESISTOR	1	TP 1.74KOHM 1/10W +-1%

EPSON STYLUS 200

Page 5 of 14

[illegible]

EPSON

STYLUS 200

Page 6 of 14

REF	PART NO.	DESCRIPTION	QTY	REMARKS
250	2017189	BOARD ASSY. I/F	1	
300	2018212	BOARD ASSY. P/ S 120V	1	
300	2018213	BOARD ASSY. P/ S 220V/240V	1	
400	2002364	POWER CABLE (VD31303SA-10A)	1	230V
401	2006741	POWER CABLE (BS31303SA-SR-10A)	1	240V
402	2010468	AC CABLE	1	240V
403	2002365	POWER CABLE VD00303SA-10A	1	220V
403	2008768	POWER CABLE	1	220V
330	2018603	WIRE HARNESS	1	
331	2018052	HARNESS	1	
410	2018054	POWER CABLE ASSY.	1	
411	2018055	POWER CABLE ASSY.	1	
412	2018028	HARNESS	1	
500	2022404	PRINTER MECHANISM	1	M-4C11
501	1024297	PULLEY ASSY. DRIVEN	1	
502	1023899	FRAME BASE	1	
503	2017754	DETECTOR PE	1	0V 0A 0W
504	1029912	FRAME LEFT;B	1	
505	1023909	FRAME FRONT	1	
506	1023907	FRAME RIGHT	1	
507	1024300	CARRIAGE ASSY.	1	
508	1024301	CARRIAG SUB ASSY.	1	
509	1023957	LEVER ADJUST HEAD	1	
510	1024031	SLIDER CARRIAGE	1	
511	1027219	LEVER ASSY. FASTEN HEAD	1	
512	1023906	HOLDER HEAD CABLE	1	
513	1023952	HOLDER PAD HEAD CABLE	1	
514	1023953	COMPRESSION SPRING 16.11	1	
516	F047001	PRINT HEAD IJ64-0CA	1	BLACK
517	1023954	LEVER LOCATE CARRIAGE	1	
518	1023955	SLIDER	1	
519	1024032	OIL PAD	1	
520	1024050	HEAD CABLE ASSY.	1	
521	1024051	PAD HEAD CABLE	1	
522	2021349	FERRITE CORE	1	
524	1024047	TIMING BELT	1	
525	1024000	PR GUIDE UPPER	4	
526	1024887	PR GUIDE SUPPORT UPPER	6	
527	1024192	PR GUIDE LEFT	1	
528	1024002	PR GUIDE FRONT	1	
529	1024041	STAR WHEEL ASSY.	6	
530	1024005	ROD SPRING STARWHEEL	6	
531	1028670	ROLLER ASSY. EJECT OUT;B	1	
532	1024885	ROLLER ASSY. SUPPORT EJECT OUT	1	
533	1028620	LEVER ASSY. EJ;B	1	
534	1024046	ROLLER PF	1	
535	2017757	HARNESS HP	1	
536	2021833	DETECTOR HP;C	1	4V 50MA 100MW
537	2017757	HARNESS HP	1	
538	1023917	MOUNTING PLATE DETECTOR HP	1	
539	1030256	FRAME ASSY. PF;B	1	
540	1023902	SHAFT CR GUIDE	1	
541	2017756	MOTOR ASSY. CR	1	2.4W
542	1023958	MOUNTING PLATE CR MOTOR	1	
544	1024045	ROLLER ASSY. EJ	1	
545	1024302	ROLLER ASSY. LD	1	
548	1023999	ROLLER DRIVEN	4	
549	1025749	CLAMP PULLEY DRIVEN	1	

EPSON STYLUS 200

Page 7 of 14

REF	PART NO.	DESCRIPTION	QTY	REMARKS
550	1024017	LEVER TRIGGER	1	
551	1028109	CLEANER HEAD ASP;B	1	
552	1024749	HOLDER PE	1	
553	1023986	HOLDER PULLEY DRIVE	1	
554	1023982	HOLDER GUIDE PLATE	1	
555	1024881	SHEET CLUTCH	1	
556	1030258	FRAME ASSY. CAP;B	1	
557	1023983	GUIDE PLATE FRONT	1	
558	1023984	GUIDE PLATE REAR	1	
559	1023921	BUSHING P'LELISM ADJUST RT	1	
560	1023936	BUSHING P'LELISM ADJUST LT	1	
561	1023904	LEVER PG UPPER	1	
562	1023905	LEVER PG LOWER	1	
563	1023980	BUSHING LEVER CHANGE	1	
564	1029263	ROD SPRING LEVER CHANGE;B	1	
565	1023989	FRAME FASTEN GEAR	1	
566	1023990	ROD FASTEN CAM	1	
567	1023991	LEVER FASTEN CAM	1	
568	1023992	SHAFT FASTEN CAM	1	
569	1024034	LEVER CHANGE	1	
570	1024048	FLANGE PULLEY DRIVE	1	
571	1024035	SHIELDPLATE M/B	1	
572	1024206	SHIELD PLATE P/S FRONT	1	
573	1024015	CLUTCH	1	
574	1025923	PAD PRESSING PLATE HEAD	1	
576	1023995	SPUR GEAR 8	1	
577	1023997	SPUR GEAR 18	1	
578	1024003	SPUR GEAR 10.8	1	
579	1024004	SPUR GEAR 19.2	1	
580	1024014	SPUR GEAR 20.8	1	
581	1025049	SPUR GEAR 6.4	1	
582	1025129	SPUR GEAR 10.8	1	
583	1023979	COMPRESSION SPRING 0.265	1	
584	1024001	TORSIONSPRING 856.4	4	
585	1024016	EXTENSION SPRING 0.698	1	
586	1024018	TORSION SPRING 216.6	1	
587	1024733	COMPRESSION SPRING 14.70	1	
588	1024735	TORSION SPRING 867.79	1	
590	1025705	COMPRESSION SPRING 1.764	2	
591	1025706	COMPRESSION SPRING 3.9	1	
599	B100168690	PLAIN WASHER	1	10.3X0.5X18.7
600	1024878	PLAIN WASHER 10.2X0.5X12.6	1	
601	1024894	PLAIN WASHER 6.7X0.5X12.2	1	
602	B101254590	LEAF SPRING	1	6.2X0.15X11
603	1024207	U-TYPE S/ WASHER 10.3X0.25X17 S	1	
604	1023998	BUSHING 10	3	
605	B010103411	C.P.SCREW	1	M3X8
606	B010103611	C.P.SCREW	1	M3X12
607	B010403311	C.F.SCREW	1	M3X6
608	B300204211	C.B.S. SCREW	17	M3X6
609	1024892	C.P.B.(O) SCREW 1.7X5 F/ZN	1	
610	1001686	CUT WASHER	1	4.1X0.5X8
611	B150300911	RETAINING RING	1	TYPE-E(6)
612	B150301011	RETAINING RING	1	TYPE-E(7)
613	X522000010	WIRE BAND	1	
614	1024505	HEXAGON NUT NORMAL M3	3	
616	1024830	LEVER CARTRIDGE;BK	1	
618	1024828	POROUS PAD HEAD;BK	1	
619	1024033	PRESSING PLATE OIL PAD	1	

ESP0507/7

EPSON STYLUS 200

Page 8 of 14

[illegible]


EPSON STYLUS 200

Page 9 of 14

[illegible]

EPSON
STYLUS 200


Page 10 of 14

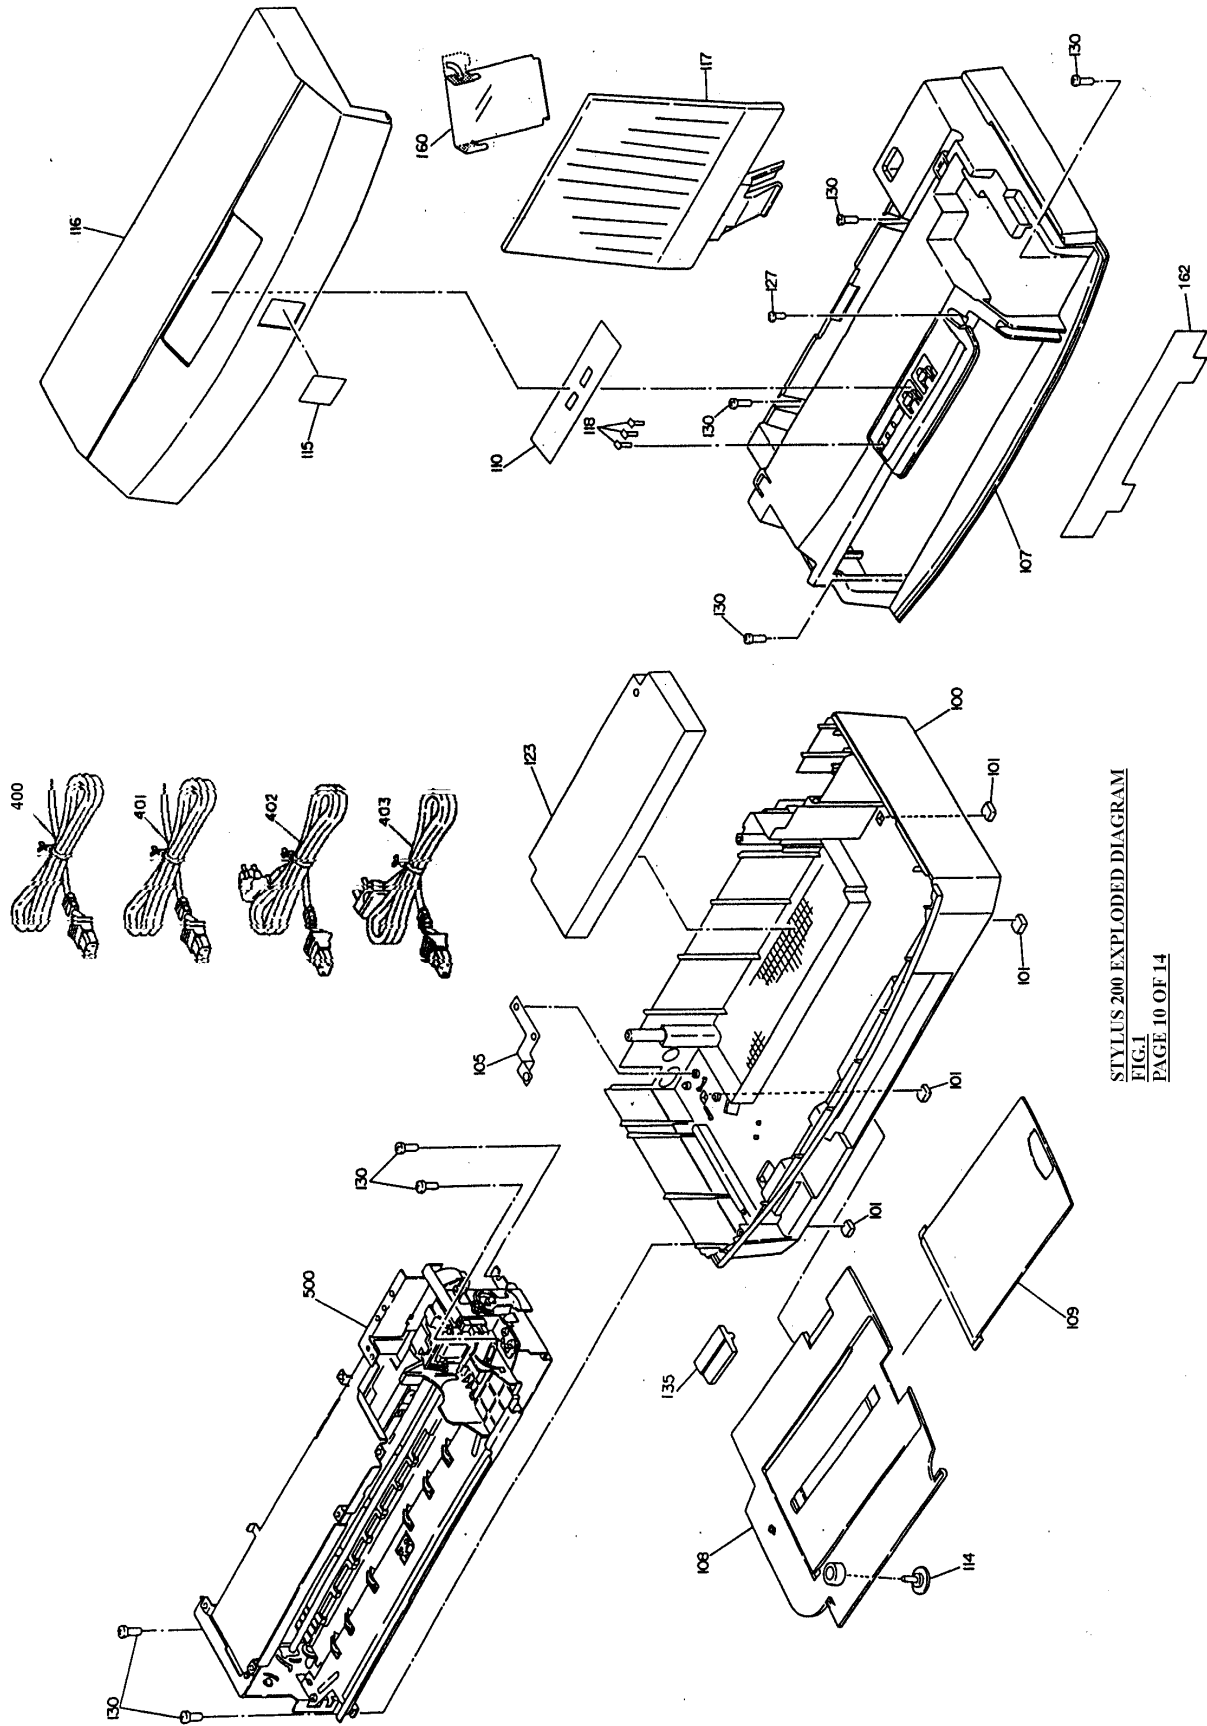

STYLUS 200 EXPLODED DIAGRAM
FIG.1
PAGE 10 OF 14

EPSON STYLUS 200


Page 11 of 14

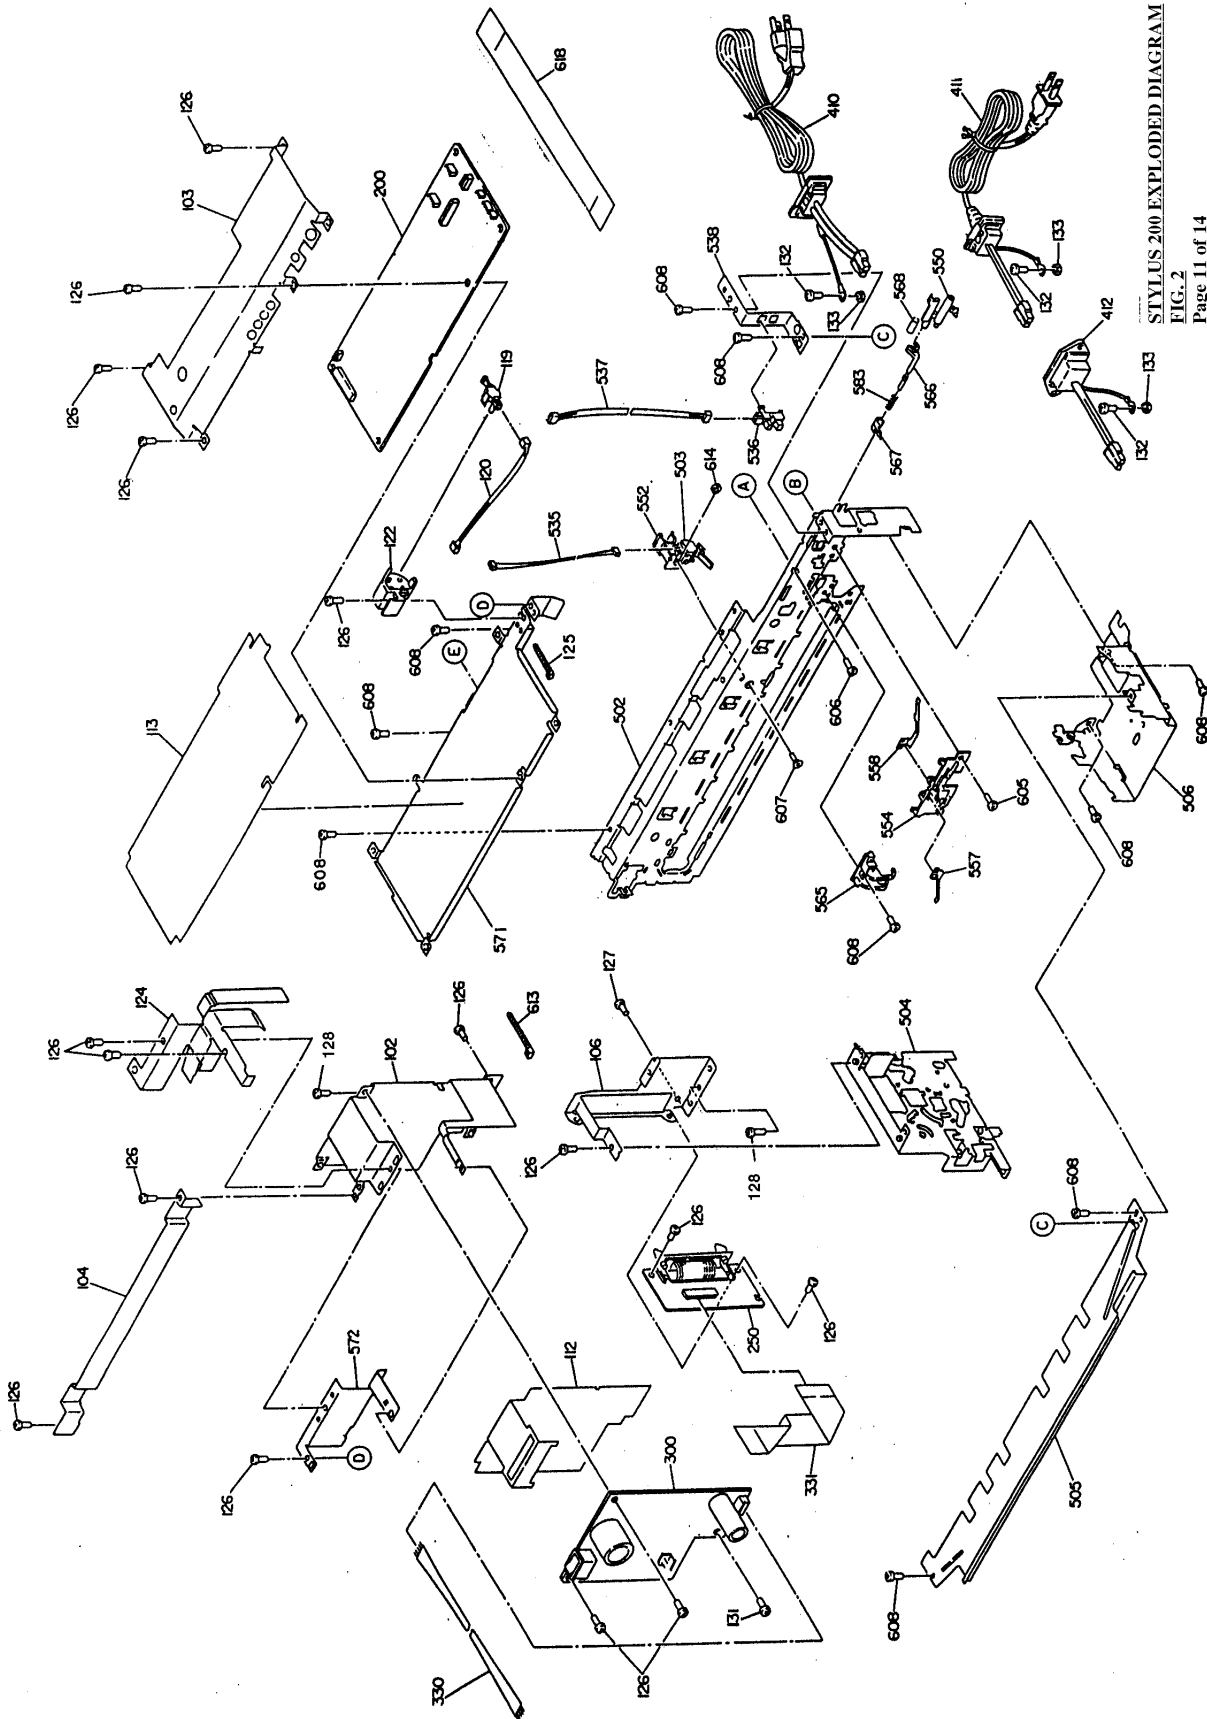

STYLUS 200 EXPLODED DIAGRAM
FIG. 2
Page 11 of 14


EPSON
STYLUS 200

Page 12 of 14

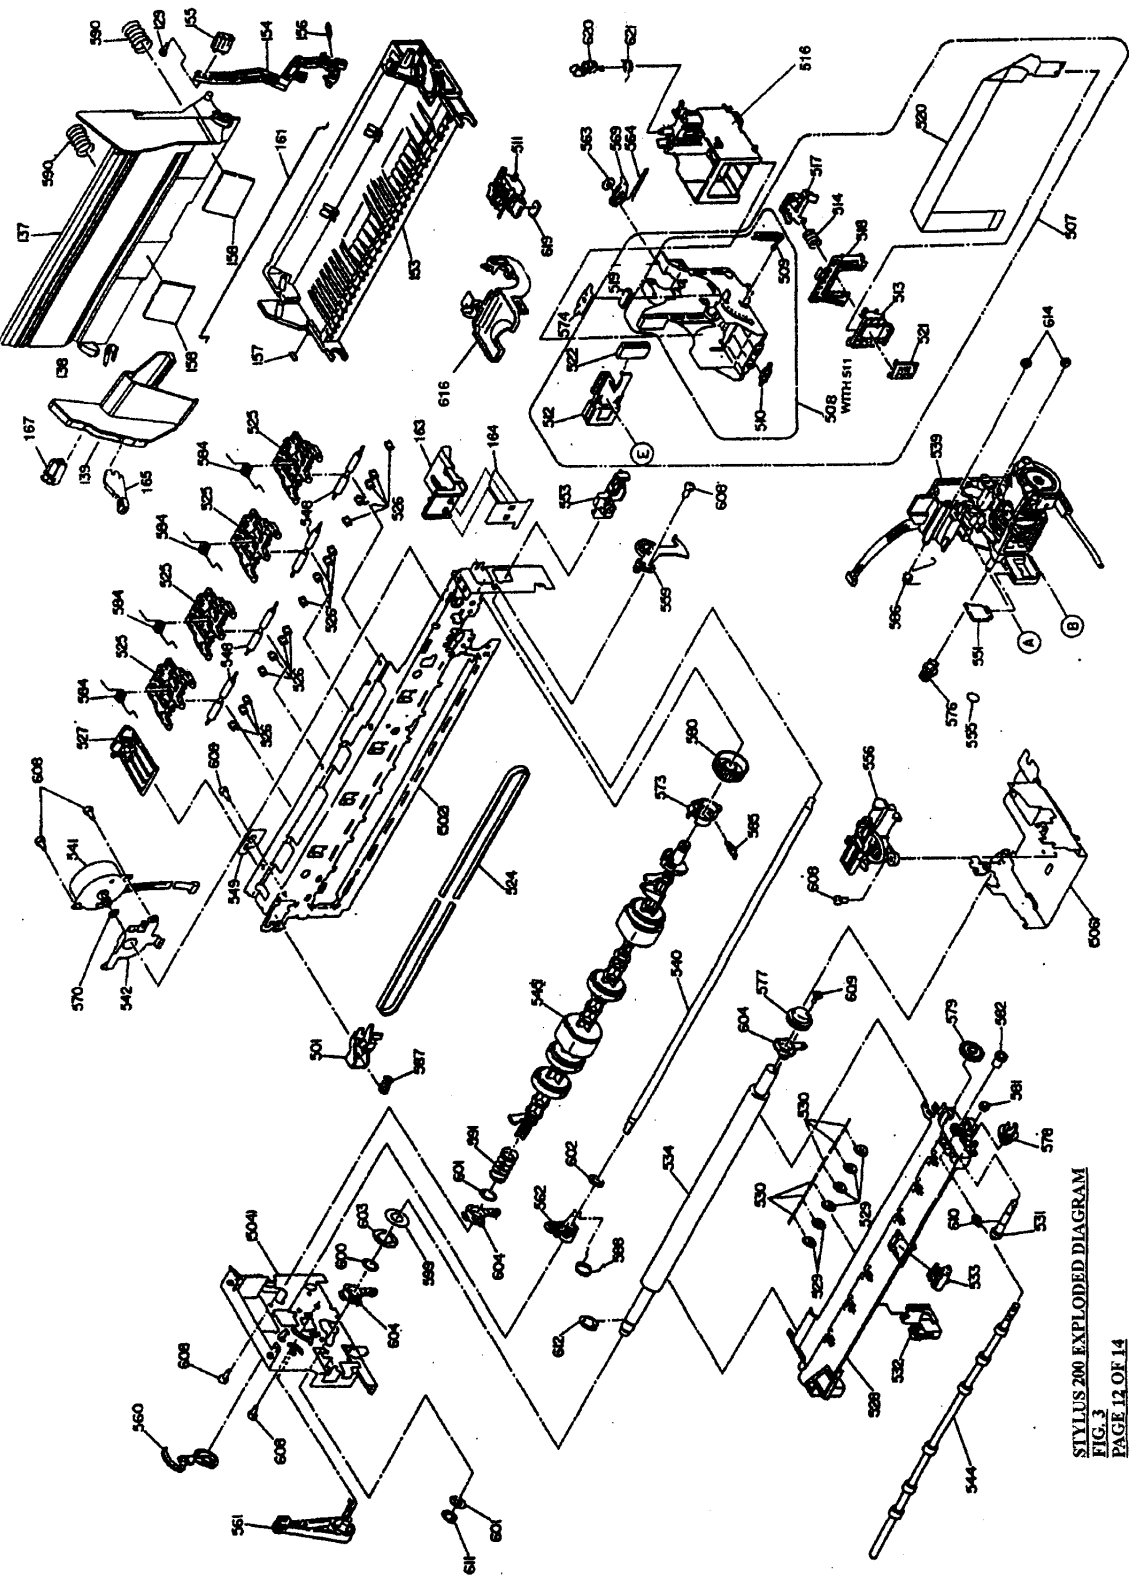


STYLUS 200 EXPLODED DIAGRAM
FIG. 3
PAGE 12 OF 14


183 EUROPE, LATIN

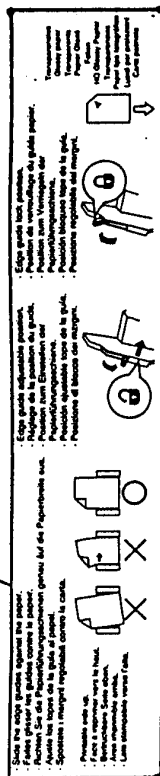


183 USA, S.E.ASIA, OCEANIA

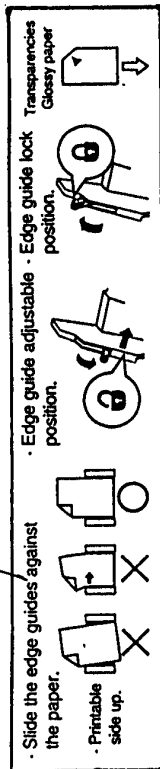


185




184 LATIN

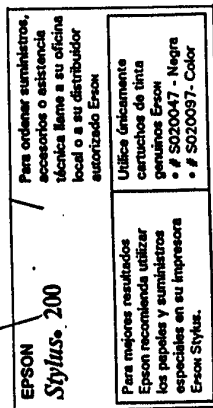

186



182 USA, S.E.ASIA, OCEANIA




180 EUROPE, LATIN




180 USA, S.E.ASIA, OCEANIA




181 EUROPE, LATIN



181 USA, S.E.ASIA, OCEANIA




182 EUROPE, LATIN



STYLUS 200 LABELS
PAGE 13 OF 14

EPSON STYLUS 200

Page 14 of 14

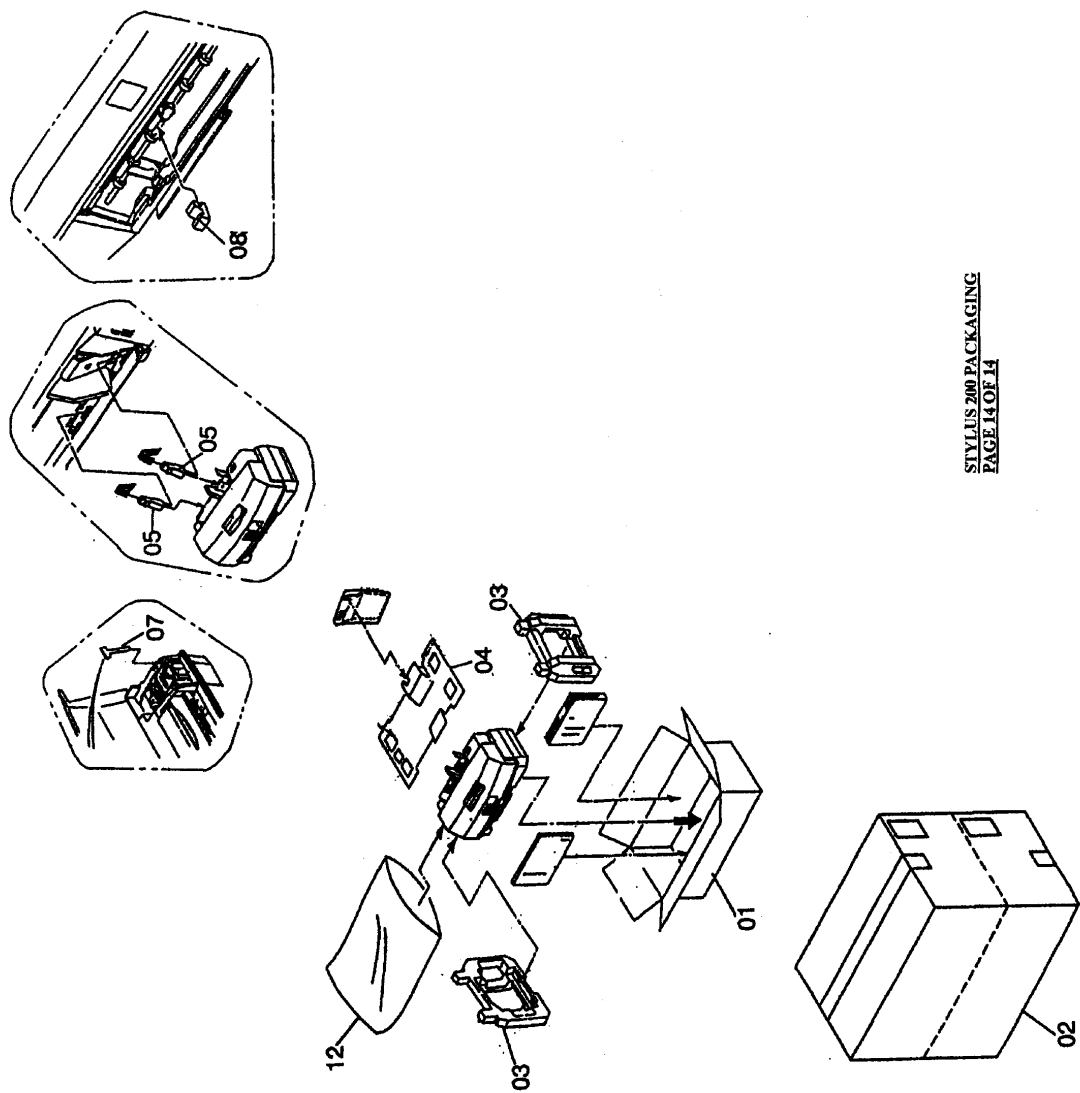

STYLUS 200 PACKAGING
PAGE 14 OF 14

EPSON

SPARES AND SERVICE

You may copy short extracts from this document for identification purposes only. Complete sections can be purchased from Epson (UK) Ltd., spares wholesalers.

Ensure that the full part number is quoted in all communications with Epson and all Epson appointed wholesalers.

If a list is found to be inaccurate please contact in writing:

**The Spares Department
Epson (UK) Ltd.
Campus 100
Maylands Avenue
Hemel Hempstead
Herts.
HP2 7EZ**

Fax (01442) 227324

© EPSON (UK) LTD. 1990

SPARES GUIDES SHOWING PRICES (R.R.P)

Prices shown are those in force at time of printing and are therefore to be taken only as a guide. Prices will be amended from time to time in accordance with Epson pricing policy.

DEC.'96

E&OE